


# F14 – 3U CompactPCI®/Express Intel® Pentium® M CPU Board

- **ULV Celeron® M 373, 1 GHz**
- **Up to Pentium® M 760, 2 GHz**
- **PCI Express® four x1 links**
- **4 HP system master or stand-alone**
- **32-bit CompactPCI® or cPCIe®**
- **Up to 2 GB DDR2 DRAM soldered**
- **CompactFlash® slot**
- **2 SATA interfaces**
- **Video via VGA and 2 SDVO**
- **2 Gigabit Ethernet (PCIe®)**
- **Up to 8 USB 2.0**
- **High Definition audio**
- **Board controller**
- **-40 to +85°C screened versions**

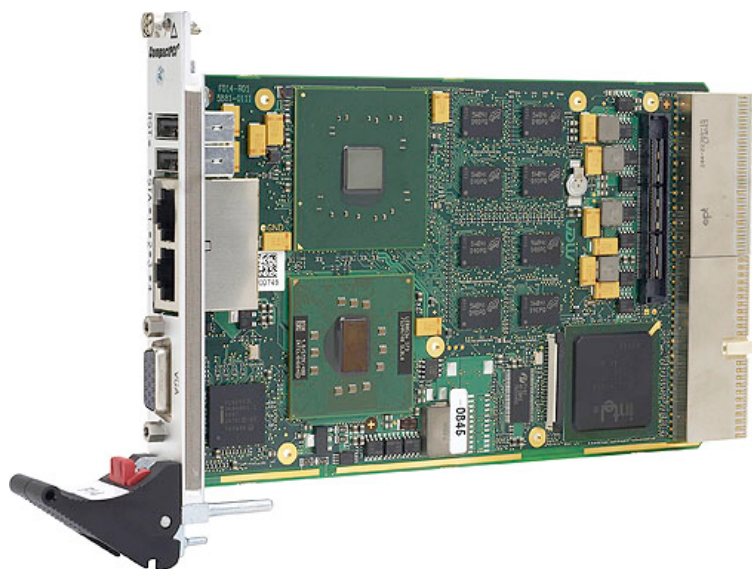

Equipped with the high-performance Intel® 2-GHz Pentium® M down to the 1-GHz ultra low voltage Celeron® M processor, the single-board computer F14 is a versatile 4 HP / 3U (single-slot, single-size Eurocard) CompactPCI® board, designed especially for embedded systems which require high computing and graphics performance and low power consumption. All versions of the CPU card come with tailored passive heat sinks within 4 HP height. Depending on the processor version forced air cooling is required inside the CompactPCI® system.

The F14 is suited for a wide range of industrial applications, for example for monitoring, vision and control systems as well as test and measurement. Main target markets comprise industrial automation, multimedia, transportation (railways, commercial vehicles), aerospace, shipbuilding, medical engineering and robotics. The robust design of the F14 together with the low-power Pentium® M processors make the board especially suited for use in rugged environments in mobile applications with regard to temperature, shock, vibration, humidity or dust according to the applicable DIN, EN or IEC industry standards. The F14 is also ready for coating so that it can be used in humid and dusty environments.


The F14 offers a 32-bit/33-MHz interface to the CompactPCI® bus and can alternatively also be used

without a bus system. In combination with a specific side card it can also perform system-slot functionality in a CompactPCI® Express system. Four PCI Express® links for high-speed communication requirements (such as Gigabit Ethernet, graphics) are supported on the board. The DDR2 DRAM is soldered to F14 to guarantee optimum shock and vibration resistance. An IDE-driven robust CompactFlash® device offers nearly unlimited space for user applications. Apart from parallel ATA support, two serial ATA lines are also available. The standard I/O available at the front panel of F14 includes graphics on VGA connector, two PCIe®-driven Gigabit Ethernet interfaces (alternatively 1 Gigabit / 1 Fast Ethernet) as well as two USB 2.0 ports. The F14 can be extended by a side card to 8 HP. I/O functions realized on the side card include two digital video outputs for flat panel connection via DVI, another four USB 2.0 ports and HD Audio. The F14 is also prepared for rear I/O where for example another two USB 2.0 ports can be connected.

Two watchdogs for thermal supervision of the processor and board temperature as well as for monitoring the operating system complete the functionality of the F14.

The F14 operates in Windows® and Linux environments as well as under major real-time operating systems like VxWorks® or QNX®. The Award BIOS was especially designed for embedded system applications. Equipped with Intel® components that come exclusively from the Intel® Embedded Line, the F14 has a guaranteed minimum standard availability of 5 years.

# Diagram

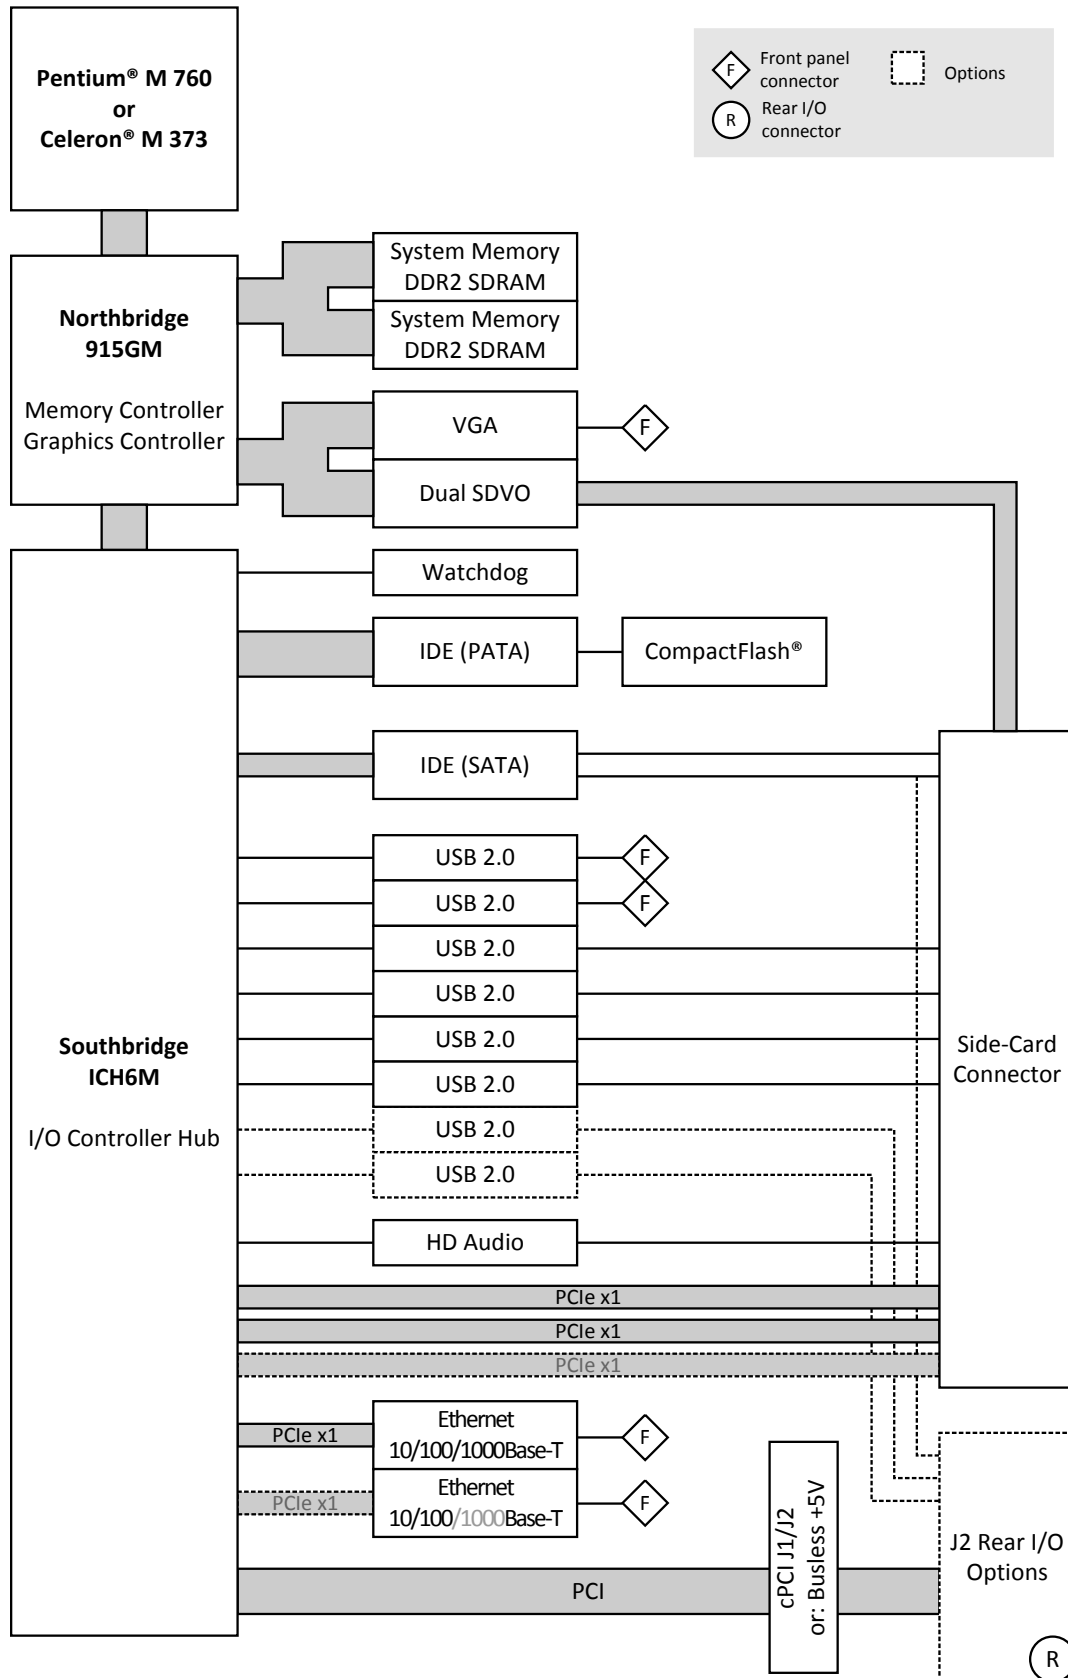

## Technical Data

<b>CPU</b>	<ul style="list-style-type: none"><li>■ ULV Celeron® M 373 up to Pentium® M 760<ul style="list-style-type: none"><li>□ 1.0 to 2.0GHz processor core frequency</li><li>□ 400MHz or 533MHz front-side bus frequency</li></ul></li><li>■ Chipset<ul style="list-style-type: none"><li>□ Northbridge: Intel® 915GM</li><li>□ Southbridge: Intel® ICH6M</li></ul></li></ul>
<b>Memory</b>	<ul style="list-style-type: none"><li>■ Up to 1MB L2 cache integrated in Celeron® M or 2MB L2 cache integrated in Pentium® M</li><li>■ Up to 2GB SDRAM system memory<ul style="list-style-type: none"><li>□ Soldered</li><li>□ DDR2</li><li>□ 400MHz or 533MHz memory bus frequency</li><li>□ Dual-channel, 2x64 bits</li></ul></li><li>■ 4Mbits boot Flash</li><li>■ Serial EEPROM 2kbits for factory settings</li><li>■ CompactFlash® card interface<ul style="list-style-type: none"><li>□ Via onboard IDE</li><li>□ Type I</li><li>□ True IDE</li><li>□ DMA support</li></ul></li></ul>
<b>Mass Storage</b>	<ul style="list-style-type: none"><li>■ Parallel IDE (PATA)<ul style="list-style-type: none"><li>□ One IDE port for local CompactFlash®</li></ul></li><li>■ Serial ATA (SATA)<ul style="list-style-type: none"><li>□ Two channels via side-card connector, or: one channel via side card and one channel via rear I/O</li><li>□ Transfer rates up to 150MB/s</li></ul></li></ul>
<b>Graphics</b>	<ul style="list-style-type: none"><li>■ Integrated in 915GM chipset<ul style="list-style-type: none"><li>□ Analog CRT DAC interface support</li><li>□ Supports max. DAC frequency up to 400 MHz</li><li>□ 24-bit RAMDAC support</li><li>□ Maximum resolutions: 2048 x 1536 pixels 16M colors @ 75Hz refresh rate (analog); 1600 x 1200 pixels 16M colors @ 60Hz (digital)</li><li>□ Incorporates Panellink Digital technology (Silicon Image)</li></ul></li><li>■ VGA connector at front panel</li><li>■ Two SDVO ports available via side-card connector<ul style="list-style-type: none"><li>□ Two additional DVI connectors at front panel optional via side card</li><li>□ Simultaneous connection of two monitors</li></ul></li></ul>
<b>I/O</b>	<ul style="list-style-type: none"><li>■ USB<ul style="list-style-type: none"><li>□ Two USB 2.0 ports via Series A connectors at front panel</li><li>□ Four USB 2.0 ports via side-card connector</li><li>□ Two USB 2.0 ports via rear I/O on request</li><li>□ UHCI and EHCI implementation</li><li>□ Data rates up to 480Mbit/s</li></ul></li><li>■ Ethernet<ul style="list-style-type: none"><li>□ Two 10/100/1000Base-T Ethernet channels, or: one 10/100/1000Base-T and one 10/100Base-T channel</li><li>□ RJ45 connectors at front panel</li><li>□ Gigabit Ethernet connected by two x1 PCIe® links</li><li>□ Onboard LEDs to signal activity status and connection speed</li></ul></li><li>■ High Definition (HD) audio<ul style="list-style-type: none"><li>□ Accessible via side-card connector</li></ul></li></ul>
<b>Front Connections (Standard)</b>	<ul style="list-style-type: none"><li>■ VGA</li><li>■ Two USB 2.0 (Series A)</li><li>■ Two Ethernet (RJ45)</li></ul>

## Technical Data

<b>Miscellaneous</b>	<ul style="list-style-type: none"> <li>■ Board controller</li> <li>■ Real-time clock, buffered by a GoldCap or alternatively a battery</li> <li>■ Watchdog timer</li> <li>■ Temperature measurement</li> <li>■ One user LED</li> <li>■ Reset button</li> </ul>
<b>PCI Express®</b>	<ul style="list-style-type: none"> <li>■ Two x1 links to connect local 1000Base-T Ethernet controllers</li> <li>■ Two x1 links for extension through side-card connector, or:</li> <li>■ Three x1 links if one Gigabit Ethernet channel is replaced by Fast Ethernet</li> <li>■ Data rate 250MB/s in each direction (2.5 Gbit/s per lane)</li> </ul>
<b>CompactPCI® Bus</b>	<ul style="list-style-type: none"> <li>■ Compliance with CompactPCI® Core Specification PICMG 2.0 R3.0</li> <li>■ CompactPCI® Express support (EXP.0 R1.0)</li> <li>■ System slot</li> <li>■ 32-bit/33-MHz CompactPCI® bus</li> <li>■ V(I/O): +3.3V (+5V tolerant)</li> </ul>
<b>Busless Operation</b>	<ul style="list-style-type: none"> <li>■ Board can be supplied with +5V only, all other voltages are generated on the board</li> <li>■ Backplane connectors used only for power supply</li> </ul>
<b>Electrical Specifications</b>	<ul style="list-style-type: none"> <li>■ Supply voltage/power consumption: <ul style="list-style-type: none"> <li>□ +5V (-3%/+5%), approx. 2.5A (ULV Celeron® M 373), approx. 7.5A (Pentium® M 760)</li> <li>□ +3.3V (-3%/+5%), approx. 1A</li> <li>□ +12V (-10%/+10%), approx. 10mA</li> <li>□ If the board is supplied with 5V only (typically without a bus connection), the 3.3V are generated on the board and fed to the backplane (3A max.) No external 3.3 V voltage may be applied in that case!</li> </ul> </li> <li>■ MTBF: 86,600h @ 40°C (derived from MIL-HDBK-217F)</li> </ul>
<b>Mechanical Specifications</b>	<ul style="list-style-type: none"> <li>■ Dimensions: conforming to CompactPCI® specification for 3U boards</li> <li>■ Weight: 370g</li> </ul>
<b>Environmental Specifications</b>	<ul style="list-style-type: none"> <li>■ Temperature range (operation): <ul style="list-style-type: none"> <li>□ 2GHz Pentium® M760: 0..+60°C</li> <li>□ Conditions: airflow 1.5m/s, typical power dissipation 32W, with Windows® XP operating system, 1 Gb Ethernet and hard disk, without CPU clock reduction</li> <li>□ 1GHz Celeron® M373: -40..+85°C</li> <li>□ Conditions: airflow 1.5m/s, typical power dissipation 16W, with Windows® XP operating system, 1 Gb Ethernet and hard disk, without CPU clock reduction</li> </ul> </li> <li>■ Temperature range (storage): -40..+85°C</li> <li>■ Relative humidity (operation): max. 95% non-condensing</li> <li>■ Relative humidity (storage): max. 95% non-condensing</li> <li>■ Altitude: -300m to + 3,000m</li> <li>■ Shock: 15g/11ms</li> <li>■ Bump: 10g/16ms</li> <li>■ Vibration (sinusoidal): 2g/10..150Hz</li> <li>■ Conformal coating on request</li> </ul>
<b>Safety</b>	<ul style="list-style-type: none"> <li>■ PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers</li> </ul>
<b>EMC</b>	<ul style="list-style-type: none"> <li>■ Tested according to EN 55022 (radio disturbance), IEC61000-4-2 (ESD) and IEC 61000-4-4 (burst)</li> </ul>
<b>BIOS</b>	<ul style="list-style-type: none"> <li>■ Award BIOS</li> </ul>
<b>Software Support</b>	<ul style="list-style-type: none"> <li>■ Windows®</li> <li>■ Linux</li> <li>■ VxWorks®</li> <li>■ QNX®</li> <li>■ <a href="#">For more information on supported operating system versions and drivers see Downloads.</a></li> </ul>

## Configuration & Options

### Standard Configurations

Article No.	CPU Type	Clock	System RAM	CFlash	Ethernet	RTC	Side Card Slot	Operation Temperature
02F014-00	Celeron M 373	1 GHz	512 MB	0 MB	1Gb, 1 Fast Ethernet	GoldCap	right	0..+60°C
02F014-01	Pentium M 760	2 GHz	1 GB	0 MB	2 Gb Ethernet	GoldCap	right	0..+60°C
02F014-02	Celeron M 373	1 GHz	512 MB	0 MB	1Gb, 1 Fast Ethernet	GoldCap	right	-40..+85°C
02F014-13	Pentium M 760	2 GHz	1 GB	0 MB	2 Gb Ethernet	battery	right	0..+60°C

### Options

<b>CPU</b>	<ul style="list-style-type: none"> <li>■ Celeron® M 373 ULV, 1.0GHz</li> <li>■ Celeron® M 370, 1.5GHz</li> <li>■ Pentium® M 738 LV, 1.4GHz</li> <li>■ Pentium® M 745 LV, 1.8GHz</li> <li>■ Pentium® M 760, 2.0GHz</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>■ System RAM                             <ul style="list-style-type: none"> <li>□ 256 MB, 512 MB, 1 GB or 2 GB</li> </ul> </li> <li>■ CompactFlash®                             <ul style="list-style-type: none"> <li>□ 0 MB up to maximum available</li> </ul> </li> </ul>
<b>Graphics</b>	<ul style="list-style-type: none"> <li>■ One or two DVI-D connectors at front via side card                             <ul style="list-style-type: none"> <li>□ Simultaneous connection of two monitors</li> </ul> </li> </ul>
<b>I/O</b>	<ul style="list-style-type: none"> <li>■ Ethernet                             <ul style="list-style-type: none"> <li>□ 9-pin D-Sub connector with one or two 10/100Base-T ports instead of two RJ45 connectors</li> <li>□ Two M12 connectors with two 10/100/1000Base-T ports instead of two RJ45 connectors on 8HP</li> </ul> </li> </ul>
<b>Rear I/O</b>	<ul style="list-style-type: none"> <li>■ One SATA channel (instead of one side-card channel)</li> <li>■ Two USB 2.0 ports</li> </ul>
<b>Real-Time Clock</b>	<ul style="list-style-type: none"> <li>■ Buffered by battery instead of GoldCap                             <ul style="list-style-type: none"> <li>□ For retention of time/date data after a power off of more than 8-10 hours. When a 1.8" PATA hard disk is used, no battery can be used on the CPU board</li> </ul> </li> </ul>
<b>Mechanical</b>	<ul style="list-style-type: none"> <li>■ Side card can be added at left or right side of CPU</li> </ul>
<b>Operation Temperature</b>	<ul style="list-style-type: none"> <li>■ Depends on system configuration (CPU, hard disk, heat sink...)</li> <li>■ Minimum: -40°C (all processors)</li> <li>■ Maximum:                             <ul style="list-style-type: none"> <li>□ +60°C (Pentium® M 760)</li> <li>□ +85°C (Celeron® M 373)</li> </ul> </li> </ul>
<b>Cooling Concept</b>	<ul style="list-style-type: none"> <li>■ Also available with conduction cooling in MEN CCA frame</li> </ul>

Please note that some of these options may only be available for large volumes. Please ask our sales staff for more information.

## Ordering Information

<b>Standard F14 Models</b>	<b>02F014-01</b>	Pentium® M 760, 2GHz, 1GB DDR2 DRAM, 2 Gigabit Ethernet, 0..+60°C
	<b>02F014-13</b>	Pentium® M 760, 2GHz, 1GB DDR2 DRAM, 2 Gigabit Ethernet, battery, 0..+60°C
	<b>02F014-30</b>	Celeron® M 373, 1GHz, 1GB DDR2 DRAM, 2 Gigabit Ethernet, 0..+60°C
	<b>02F014-31</b>	Celeron® M 373 1GHz, 1GB DDR2 DRAM, 2 Gigabit Ethernet, -40..+85°C
<b>Related Hardware</b>	<b>02F600-00</b>	2 COM extensions and SATA hard disk slot, for F14 and compatible SBCs, -40..+85°C screened
	<b>02F601-00</b>	1 DVI-D and 1 audio at front, SATA hard disk slot, for F14 and compatible SBCs, 4HP, 0..+60°C
	<b>02F601-02</b>	2 DVI-D, 1 audio, 1 COM (via SA-Adapter™) at front, SATA hard disk slot, for F14 and compatible SBCs, 8HP, 0..+60°C
	<b>02F602-00</b>	3U CompactPCI® to CompactPCI® Express side card with 1 USB, 1 COM, 1 DVI, SATA hard disk slot, for F14 and compatible SBCs, 0..+60°C
	<b>02F603-00</b>	3U CompactPCI® side card with 2 USB and 1 COM extension, SATA hard disk and CompactFlash® slot, for F14 and compatible SBCs, mounted to the right of the SBC, 0..+60°C
	<b>02F604-00</b>	3U CompactPCI® side card with 1 IEEE 1394 FireWire, 1 DVI, 1 HD audio and 1 COM extension, SATA hard disk slot, for F14 and compatible SBCs, mounted to the right of the SBC, 0..+60°C
	<b>02F606-00</b>	2 Gigabit Ethernet on Lemo railway compliant connectors, 1 COM extension (SA-Adapter™ not included), SATA hard disk slot, for F14 and compatible SBCs, conformally coated, -40...+85°C screened
	<b>02F608-00</b>	4 SATA and 2 COM ports, additional SATA hard disk slot on-board, for F14 and compatible SBCs, mounted to the right of the SBC, 0..+60°C
<b>Memory</b>	<b>0751-0042</b>	CompactFlash® card, 4 GB, Type I, fixed bit set, -40..+85°C
	<b>0751-0055</b>	CompactFlash® card, 8 GB, Type I, fixed bit set, -40..+85°C
	<b>0751-0058</b>	CompactFlash® card, 16 GB, Type I, fixed bit set, -40..+85°C
	<b>0751-0061</b>	CompactFlash® card, 2 GB, Type I, fixed bit set, -40 to +85°C
<b>Systems &amp; Card Cages</b>	MEN delivers turn-key systems completely installed (hardware, operating system, accessories), wired and tested. Different rack sizes, power supplies and backplanes on request. For details please contact your local sales representative.	
	<b>0701-0046</b>	CompactPCI® 19" 4U/24HP desktop system for 3U cards, 3-slot 3U CompactPCI® backplane, system slot right, 1U fan tray with 1 fan, 8 HP space for 1 pluggable PSU
	<b>0701-0056</b>	CompactPCI® 19" 4U/84HP rack-mount enclosure for 3U cards (vertical), 4+4-slot 3U CompactPCI® / CompactPCI® Serial hybrid backplane, prepared for rear I/O, 250W power supply wide range 90..264VAC on rear, 1U fan tray with 2 fans included, 0..+60°C
<b>Miscellaneous Accessories</b>	<b>0713-0003</b>	CompactPCI® 3U 1-slot backplane for stand-alone operation of F14, F15, F17, F18, F19P, F21P: 32-bit/33-MHz with rear I/O, 3.3V supply, ATX-power, power, JTAG, IPMB and utility connection, 6x screw connection M3

## Ordering Information

### Software: Linux

This product is designed to work under Linux. See below for potentially available separate software packages from MEN.

This product is designed to work under ELinOS Embedded Linux by Sysgo. For more information and product support please contact [www.sysgo.com](http://www.sysgo.com).

- 13Y001-06** MDISS™ low-level driver sources (MEN) for LM63 on SMBus for F14, F15, F17, F18, F19P, D9, D601, A19 and A20
- 13Y002-06** MDISS™ low-level driver sources (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 board monitoring
- 13Y004-06** MDISS™ low-level driver sources (MEN) for generic SMBus driver for F14, F15, F17, F18, F19P, F21P, F22P, G20, G22, D9, D601, F600 and F601, A19, A20, F217, SC24, BC50M, BC50I and BL50W
- 13Y007-06** MDISS™ low-level driver sources (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 board controller

### Software: Windows®

This product is designed to work under Windows®. See below for potentially available separate software packages from MEN.

- 10F014-78** Windows® XP Embedded BSP (MEN) for F11S, F14, F15, F17, F18, F19P, F21P, G20, XM1, XM1L, XM2, MM1, MM2, SC21, SC24, DC1, DC2, RC1, BC50I, BC50M and BL50W
- 13F014-77** Windows® Installset (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 (Includes all free drivers developed by MEN for the supported hardware.)
- 13T001-70** Windows® network driver (Intel®) for F14, F15, F17, F18, D9, D6, D7, D601, A19, A20 and P601, P602
- 13T002-70** Windows® chipset graphics driver (Intel®) for F14 and D601
- 13T003-70** Windows® chipset driver (Intel®) for F14, F15, F17, F18, F18E, F19P, F21P, F22P, G20, G22, XM2, D9, D6, D7, D601, A19 and A20
- 13T005-70** Windows® USB2UART driver (FTDI) for F14, F15, F17, F18, F19P, F21P, F22P, D9, A19, A20, XM2 and XM50 / XM51 / F50P / F50C hosts
- 13T006-70** Windows® HD Audio driver (Realtek) for F14, F15, F17, F18, F19P, F21P, F22P, D9 and A19

### Software: VxWorks®

This product is designed to work under VxWorks®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.

- 10F014-60** VxWorks® BSP (MEN) for F14 and D601
- 13Y001-06** MDISS™ low-level driver sources (MEN) for LM63 on SMBus for F14, F15, F17, F18, F19P, D9, D601, A19 and A20
- 13Y002-06** MDISS™ low-level driver sources (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 board monitoring
- 13Y003-60** VxWorks® driver (MEN) for USB-to-UART bridges on F600, F601, F602, F603, F604 and F606
- 13Y004-06** MDISS™ low-level driver sources (MEN) for generic SMBus driver for F14, F15, F17, F18, F19P, F21P, F22P, G20, G22, D9, D601, F600 and F601, A19, A20, F217, SC24, BC50M, BC50I and BL50W
- 13Y007-06** MDISS™ low-level driver sources (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 board controller

## Ordering Information

<p><b>Software: QNX®</b></p>	<p>This product is designed to work under QNX®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.</p> <table border="1"> <tr> <td data-bbox="470 352 646 415"><b>10F014-40</b></td> <td data-bbox="654 352 1492 415">QNX® 6.3.0 installation support files (QNX® and MEN) for F14, F15, F17, F18, F19P, XM1, XM2 and MM1</td> </tr> <tr> <td data-bbox="470 436 646 499"><b>13Y001-06</b></td> <td data-bbox="654 436 1492 499">MDISS™ low-level driver sources (MEN) for LM63 on SMBus for F14, F15, F17, F18, F19P, D9, D601, A19 and A20</td> </tr> <tr> <td data-bbox="470 520 646 583"><b>13Y002-06</b></td> <td data-bbox="654 520 1492 583">MDISS™ low-level driver sources (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 board monitoring</td> </tr> <tr> <td data-bbox="470 604 646 688"><b>13Y004-06</b></td> <td data-bbox="654 604 1492 688">MDISS™ low-level driver sources (MEN) for generic SMBus driver for F14, F15, F17, F18, F19P, F21P, F22P, G20, G22, D9, D601, F600 and F601, A19, A20, F217, SC24, BC50M, BC50I and BL50W</td> </tr> <tr> <td data-bbox="470 709 646 772"><b>13Y007-06</b></td> <td data-bbox="654 709 1492 772">MDISS™ low-level driver sources (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 board controller</td> </tr> </table>	<b>10F014-40</b>	QNX® 6.3.0 installation support files (QNX® and MEN) for F14, F15, F17, F18, F19P, XM1, XM2 and MM1	<b>13Y001-06</b>	MDISS™ low-level driver sources (MEN) for LM63 on SMBus for F14, F15, F17, F18, F19P, D9, D601, A19 and A20	<b>13Y002-06</b>	MDISS™ low-level driver sources (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 board monitoring	<b>13Y004-06</b>	MDISS™ low-level driver sources (MEN) for generic SMBus driver for F14, F15, F17, F18, F19P, F21P, F22P, G20, G22, D9, D601, F600 and F601, A19, A20, F217, SC24, BC50M, BC50I and BL50W	<b>13Y007-06</b>	MDISS™ low-level driver sources (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 board controller
<b>10F014-40</b>	QNX® 6.3.0 installation support files (QNX® and MEN) for F14, F15, F17, F18, F19P, XM1, XM2 and MM1										
<b>13Y001-06</b>	MDISS™ low-level driver sources (MEN) for LM63 on SMBus for F14, F15, F17, F18, F19P, D9, D601, A19 and A20										
<b>13Y002-06</b>	MDISS™ low-level driver sources (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 board monitoring										
<b>13Y004-06</b>	MDISS™ low-level driver sources (MEN) for generic SMBus driver for F14, F15, F17, F18, F19P, F21P, F22P, G20, G22, D9, D601, F600 and F601, A19, A20, F217, SC24, BC50M, BC50I and BL50W										
<b>13Y007-06</b>	MDISS™ low-level driver sources (MEN) for F14, F15, F17, F18, D9, D601, A19 and A20 board controller										
<p><b>Software: Firmware/BIOS</b></p>	<p>This product includes a specially adapted BIOS.</p> <table border="1"> <tr> <td data-bbox="470 835 646 877"><b>14F014-01</b></td> <td data-bbox="654 835 1492 877">System BIOS for F14 and D601</td> </tr> </table>	<b>14F014-01</b>	System BIOS for F14 and D601								
<b>14F014-01</b>	System BIOS for F14 and D601										
<p><b>Software: Miscellaneous</b></p>	<p>Intel® software development products such as analyzers, compilers, threading tools etc. can be downloaded under <a href="http://www.intel.com/cd/software/products/asmo-na/eng/index.htm">www.intel.com/cd/software/products/asmo-na/eng/index.htm</a>. IA-32 Intel® Architecture Software Developer's Manuals are available under <a href="http://www.intel.com/products/processor/manuals/index.htm">www.intel.com/products/processor/manuals/index.htm</a>.</p>										
<p>For operating systems not mentioned here <a href="#">contact MEN sales</a>.</p>											
<p><b>Documentation</b></p>	<p>Compare Chart 3U CompactPCI® / PlusIO CPU cards » <a href="#">Download</a></p> <p>Compare Chart 3U CompactPCI® / PlusIO peripheral cards » <a href="#">Download</a></p> <p>Compare Chart 3U CompactPCI® / PlusIO extension cards » <a href="#">Download</a></p> <table border="1"> <tr> <td data-bbox="470 1192 646 1234"><b>20APPN004</b></td> <td data-bbox="654 1192 1492 1234">Application Note: How to make a USB stick bootable</td> </tr> <tr> <td data-bbox="470 1245 646 1287"><b>20F014-ER</b></td> <td data-bbox="654 1245 1492 1287">F14 Errata</td> </tr> <tr> <td data-bbox="470 1297 646 1329"><b>20F014-00</b></td> <td data-bbox="654 1297 1492 1329">F14 User Manual</td> </tr> </table>	<b>20APPN004</b>	Application Note: How to make a USB stick bootable	<b>20F014-ER</b>	F14 Errata	<b>20F014-00</b>	F14 User Manual				
<b>20APPN004</b>	Application Note: How to make a USB stick bootable										
<b>20F014-ER</b>	F14 Errata										
<b>20F014-00</b>	F14 User Manual										



## Contact Information

---

### Germany

MEN Mikro Elektronik GmbH  
Neuwieder Straße 3-7  
90411 Nuremberg  
Phone +49-911-99 33 5-0  
Fax +49-911-99 33 5-901

info@men.de  
www.men.de

### France

MEN Mikro Elektronik SA  
18, rue René Cassin  
ZA de la Châtelaine  
74240 Gaillard  
Phone +33 (0) 450-955-312  
Fax +33 (0) 450-955-211

info@men-france.fr  
www.men-france.fr

### USA

MEN Micro Inc.  
860 Penllyn Blue Bell Pike  
Blue Bell, PA 19422  
Phone (215) 542-9575  
Fax (215) 542-9577

sales@menmicro.com  
www.menmicro.com

*The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.*

*MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.*

*MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.*

*The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.*

*In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.*

Copyright © 2013 MEN Mikro Elektronik GmbH. All rights reserved.