

# JetSys-5330 Rugged AI Platform

## NVIDIA-BASED SMALL FORM FACTOR (SFF)

### DESCRIPTION

Elma's JetSys-5330 is a small form factor (SFF), rugged embedded computing system based on the NVIDIA® Jetson AGX Orin™ system-on-module (SoM). Housed in a rugged compact enclosure, the JetSys-5330 can deliver up to 275 TOPS of AI performance with the ability to tune the power consumption to match deployment requirements. The JetSys-5330 also offers numerous expansion sites, allowing it to be customized for I/O and storage needs.

The Jetson AGX Orin is a powerful AI inference engine system-on-module (SoM), featuring an NVIDIA® Ampere architecture GPU, an array of Arm® Cortex® A78AE CPUs, deep learning and vision accelerators, a video encoder/decoder, high-speed I/O, impressive 204 GB/s of memory bandwidth and 32GB or 64GB of DRAM, enabling these modules to feed multiple concurrent AI application pipelines.

This rugged system also provides a number of I/O options including HD-SDI, Gigabit Ethernet (with Power-over-Ethernet), or GMSL1/2 cameras, and LTE/5G, along with built-in USB3.2, CAN Bus, and other industry standard interfaces. The JetSys-5330 is IP67 rated for ingress protection and is qualified to MIL-STD-810G for operation in harsh environments.

The JetSys-5330 SFF embedded system is ideal for defense applications that require very high levels of computation, such as video and image processing, signal processing and deep learning in next generation autonomous vehicles, surveillance, targeting and electronic warfare (EW) systems.



### Features

- Jetson AGX ORIN SoM (32GB or 64GB variant available)
- Expandable through two M.2 and three mPCI sites (one doubles as mSATA)
- 6-channel GMSL1/GMSL2 camera input
- HD-SDI and Gigabit Ethernet cameras supported
- Support for two removable solid-state drives
- Wireless connectivity via WiFi+BT or LTE/5G
- Door-accessible drive bay with support for up to two removable 2.5" solid state drives
- Fan kit available, if needed
- Rugged design; qualified to military standards, MIL-STD-810, MIL-STD-461, MIL-STD-704, MIL-STD-1257 and DO-160 section 25 ESD

### Benefits

- Powerful AI processing in a rugged, edge computing package
- Easily configurable and expandable to meet mission requirements
- Provides mission-critical rugged SFF autonomy with server-class AI processing in remote locations with challenging connectivity
- Offers real-time responsiveness, minimal latency, and low-power consumption
- Redefines the possibilities for extending advanced AI from the cloud to the edge
- Provides 275 TOPS and more than 5 TFLOP/s of AI processing performance

# JetSys-5330 Rugged AI Platform

## NVIDIA-BASED SMALL FORM FACTOR (SFF)

### RELATED PRODUCTS

#### JetSys and JetKit Family

- › High Performance GPU Based Computing Products
- › Rugged, Industrial, and Plug-in packages available



JetSys and JetKit Family

#### NetSys Family

- › Compact mobile, IP router
- › Cisco router/Ethernet switch combination
- › Railway compliant mobile router (ESR-5915)



NetSys 5300 Family



### APPLICATIONS

- Defense 360-degree situational awareness, automatic target recognition/tracking, etc
- Robotics in rugged environments
- Rugged autonomous vehicle applications: mining, agriculture, construction, etc
- Intelligent video analytics in remote/challenging environments
- Ideal for wireless multi access edge computing applications (MEC)
- Artificial intelligence (AI)
- Augmented or virtual reality (AR and VR)
- Computer vision
- Deep learning
- Robotic localization / mapping

The JetSys-5330 is a small form factor embedded system capable of running high performance intelligent video analytics (IVA), virtual reality (VR), augmented reality (AR) and artificial intelligence applications at the edge, as well as applications on unmanned vehicles and robots. Multiple camera interfaces make the JetSys-5330 an ideal platform for vision intelligence applications (e.g. object detection and tracking, semantic segmentation, scene understanding and video surveillance).

The JetSys-5330 uses the NVIDIA® Jetson AGX Orin™ system-on-module (SoM), and features a Deep Learning Accelerator (DLA) optimized for deep learning operations. The GPU is based on NVIDIA®'s Ampere architecture and is divided into two Graphic Processing Clusters (GPCs), up to 8 Texture Processing Clusters (TPCs), and up to 16 Streaming Multiprocessors (SMs). There are 128 CUDA cores per SM, providing up to 2048 NVIDIA® CUDA® cores and up to 64 (64GB) Tensor Cores depending on the AGX Orin™ model (32GB or 64GB). The GPU can run up to 1.3 GHz on the 64GB model. This provides up to 275 TOPS and 5.3 FP32 TFLOPs of CUDA computing power.

This processor is designed to do full hardware acceleration of convolutional neural network inferencing. The built-in video encoder / decoder, and Programmable Vision Accelerator give the AGX Orin™ unprecedented video and image processing power. This provides the power to run high performance deep learning-based inference engines to perform tasks such as object detection and image segmentation of multiple video image streams captured through GMSL 1/2, HD-SDI, Ethernet, or USB3.2 cameras interfaced using high-speed circular connectors. Developers can utilize NVIDIA®'s CUDA and deep learning SDKs to develop numerous applications in traffic control, human-computer interaction, augmented reality and visual surveillance based on object recognition and inference and enable rapid deployment of AI-based perception processing.



Optional enclosure for fan support

# JetSys-5330 Rugged AI Platform

## NVIDIA-BASED SMALL FORM FACTOR (SFF)

### SPECIFICATIONS

#### Processor

Jetson AGX Orin, 32GB or 64GB

#### Interface

High-speed Networking: 10GBASE-T

Networking: 1000BASE-T

#### Audio

- Mic In (mono)
- Stereo Line In
- Stereo Line Out
- Stereo Headphone Out

Display: DisplayPort 2.0, 1.4 with MST support

#### USB:

- USB 3.2 Gen2 Type A (3x)
- USB 3.2 Type C (2x)
- USB 2.0 Type A (4x)

CAN Bus (2x)

#### Serial:

- RS-422 FD (2x)
- RS-232 (1x)

GPIO (9x)

Support for two removable solid-state drives

Support for WiFi+BT or LTE/5G

Fan kit available

#### Expansion

Support for up to three mPCIe modules (one doubles as mSATA)

Two M.2 sites

- One B-key, with USB3, one-lane of PCIe and SIM card support
- One M-key, with SATA and four-lanes of PCIe (NVMe)

#### Environmental

Temperature: -40°C to 55°C or 71°C operational, depending on the configuration  
-40°C to 85°C storage

Operating shock: 40 g; 11ms

Random vibration: 10Hz to 2000Hz

Humidity: Up to 95% RH non-condensing

Ingress protection: IP67

#### Power

Input 16.5VDC to 50VDC, 28VDC Nominal

Power consumption 52W to 130W depending on the configuration

#### Physical

Height: 12.5mm (4.43"), 117mm (4.6") with the fan kit

Width: 343.5mm (13.52)

Depth: 222.4mm (8.75"), 249mm (9.8") with the fan kit


Weight: 6.35kg to 7.6kg (14 to 16.72 lbs) depending on the configuration

Contact factory for additional environmental qualification details


# JetSys-5330 Rugged AI Platform

NVIDIA-BASED SMALL FORM FACTOR (SFF)

## CONNECTOR CALLOUTS

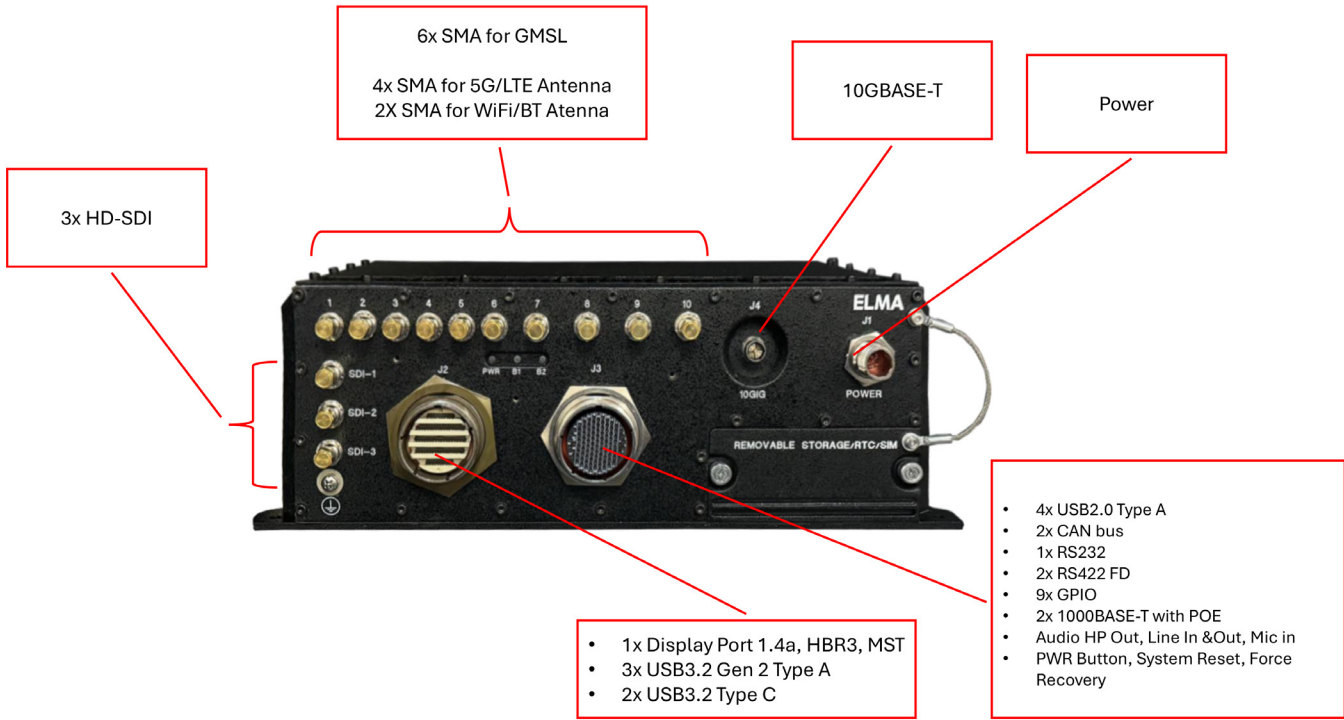

## CONNECTION AND BLOCK DIAGRAM

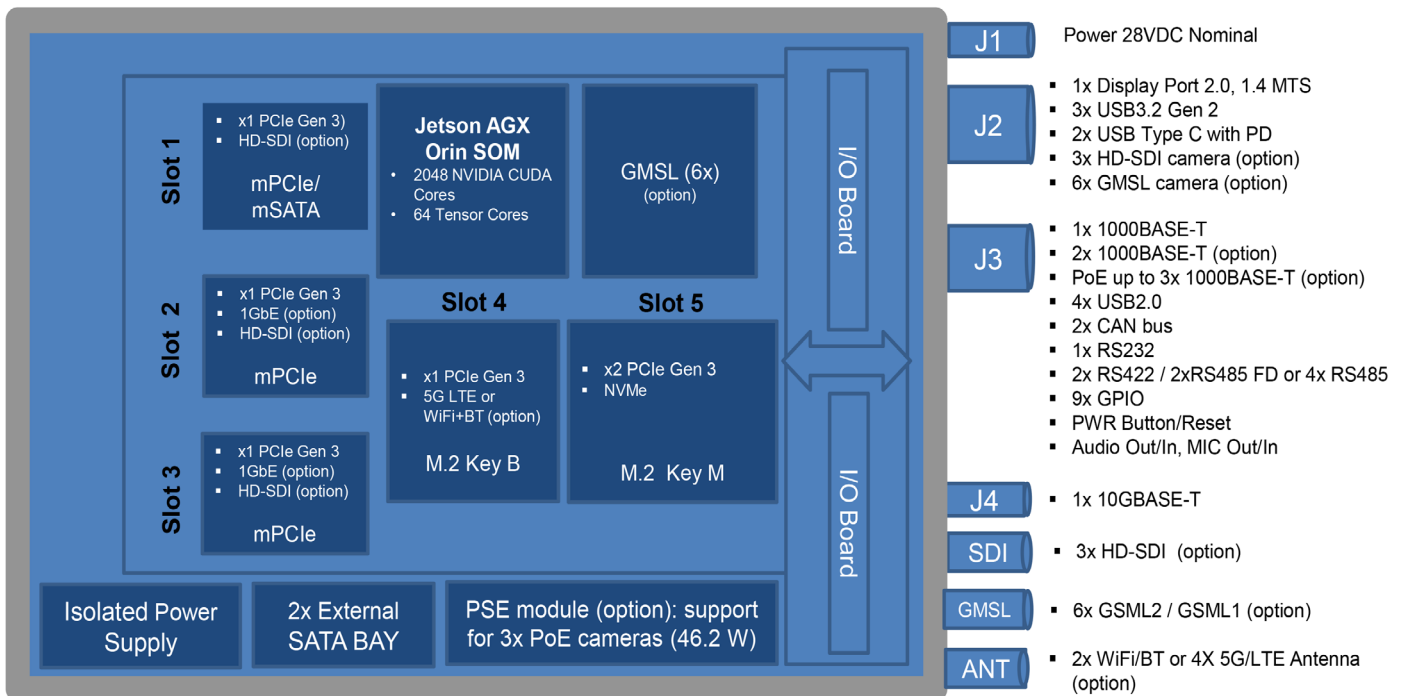

# JetSys-5330 Rugged AI Platform

## NVIDIA-BASED SMALL FORM FACTOR (SFF)

### JetSys-5330 Options

#### Base Unit – Not Selectable:

Base JetSys-533x	Included Features	Connection	Model Number
Base JetSys-5330 Model (64GB)  <i>Add Options Listed Below</i>	Power 28VDC Nominal	J1	JetSys-5330-2S.L.B.PX.PX.PX.BX.MX.1
	1x Display Port 1.4a, HBR3, MST	J2	
	3x USB3.2 Gen 2 Type A	J2	
	2x USB3.2 Type C	J2	
	4x USB2.0 Type A	J3	
	2x CAN bus	J3	
	1x RS232	J3	
	2x RS422 FD	J3	
	9x GPIO	J3	
	PWR Button, System Reset, Force Recovery	J3	
	Audio HP Out, Line In & Out, Mic in	J3	
	1x 1000BASE-T	J3	

#### Add-in Options - These options are selectable but can only be configured at the Factory (contact Sales / Factory for specific configurations):

Options	Included Features	Model Number
GMSL	Up to 6 GMSL Cameras	Custom configuration  Contact Factory for more details
mPCIe Slot 1	1x mSATA or 1xHD-SDI	
mPCIe Slot 2	1x 1000BASE-T with POE or 1xHD-SDI	
mPCIe Slot 3	1x1000BASE-T with POE or 1xHD-SDI	
M.2 (Key M) (Slot 4)	1xNVMe/SATA	
M.2 (Key B) (Slot 5)	5G/LTE or WiFi + Bluetooth	

### ACCESSORY ORDER INFORMATION

I/O Cable Kit (s)	CAE059026 Lab Cable Kit - consisting of: <ul style="list-style-type: none"> <li>• CAE059147 Input Power</li> <li>• CAE059148 High Speed Signals</li> <li>• CAE059149 Misc.Signals</li> <li>• CAE059147 10BASE-T</li> </ul>
NVMe/ SATA SSD Options:	<ul style="list-style-type: none"> <li>• 1 TByte, 2 TByte, 4 TByte</li> </ul>

Copyright 2024 by Elma Electronic Inc. Subject to technical modifications, all data supplied without liability.

#### Please contact our sales team for more details.

United States: +1 510 656 3400  
France: +33 388 56 72 50

Germany: +49 7231 97 34 0  
Israel: +972 3 930 50 25

Singapore: +65 6479 8552  
Switzerland: +41 44 933 41 11

United Kingdom: +44 1234 838 822