


SA24M – IBIS Master SA-Adapter



- 1 channel master
- Over-current and short-cut protection
- Optical isolation
- -40 to +85°C screened

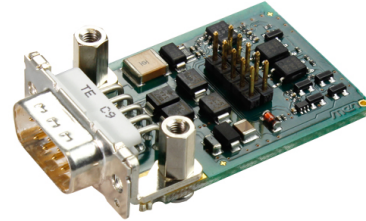

The SA24M provides one IBIS master interface with an external 24V supply. While a fieldbus master controls the data traffic, the data transfer between master and slave participants is initiated only by the master. IBIS is a fieldbus used in public transport vehicles. It is based on a UART structure and can therefore be combined with MEN boards that support any kind of UART interfaces together with SA-Adapter slots. SA-Adapters are small universal boards providing the physics for legacy serial I/O, fieldbus interfaces and

other small I/O functions. One serial line is provided per adapter, which can be plugged directly to the CPU board as a mezzanine. Alternatively, the adapter can be connected to the front panel via ribbon cable. The SA concept allows to add additional I/O interfaces to many of MEN's CPU boards and box PCs, enhancing flexibility with regard to the line transceivers and isolation requirements. Whether a specific SA-Adapter (or a mix of different SA-Adapters) fits on a specific CPU board is determined by a combination of mechanical, performance, FPGA and operating system criteria and needs to be verified for every board configuration requested.

Diagram

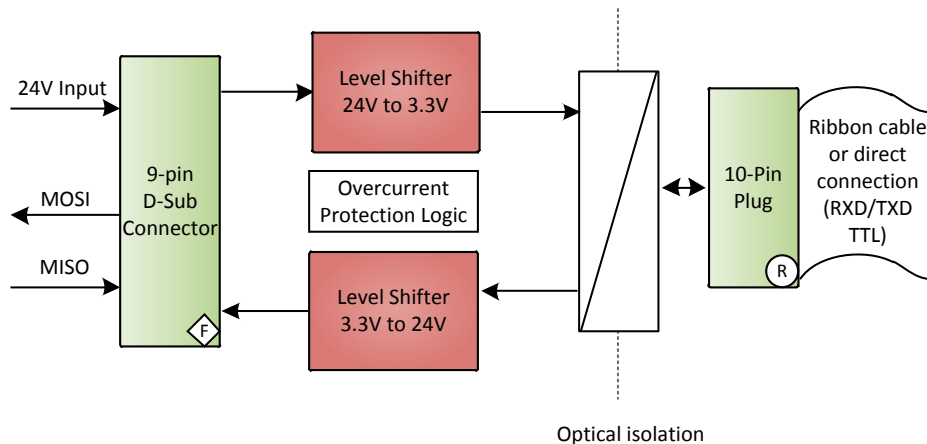

Technical Data

Interfaces	<ul style="list-style-type: none"> ■ IBIS master on front connector <ul style="list-style-type: none"> □ External 24V power supply on front connector for IBIS signal level □ Standard IBIS data rate (1200 bit/s) up to standard UART data rate (up to 9600 bit/s) ■ Serial TTL Interface on 10-pin SA-Adapter connector
Installation	<ul style="list-style-type: none"> ■ As a piggy-back board directly on a carrier board ■ Via ribbon cable
Peripheral Connections	<ul style="list-style-type: none"> ■ Via front panel on a shielded 9-pin D-Sub receptacle connector
Electrical Specifications	<ul style="list-style-type: none"> ■ Isolation voltage: <ul style="list-style-type: none"> □ 750V DC or 500V AC between isolated side and digital side ■ Supply voltage/power consumption: <ul style="list-style-type: none"> □ Digital side +5V (-3%/+5%), 10 mA typ. (25 mA max.) □ Isolated side +24V (-30%/+25%), 10mA typ. (110 mA max., when loopback on pin 1/2) ■ MTBF: tbd @ 40°C according to IEC/TR 62380 (RDF 2000)
Mechanical Specifications	<ul style="list-style-type: none"> ■ Dimensions: 32mm x 42mm ■ Weight: <ul style="list-style-type: none"> □ 18g (Master)
Environmental Specifications	<ul style="list-style-type: none"> ■ Temperature range (operation): <ul style="list-style-type: none"> □ -40..+85°C (qualified) ■ Temperature range (storage): -40..+85°C ■ Relative humidity (operation): max. 95% non-condensing ■ Relative humidity (storage): max. 95% non-condensing ■ Altitude: -300m to + 3,000m ■ Shock: <ul style="list-style-type: none"> □ 50 m/s², 30 ms (EN 61373) □ 15 g, 11 ms (EN 60068-2-27) ■ Vibration (function): 2.02 m/s², 5 Hz to 150 Hz (EN 61373) ■ Vibration (lifetime): 11.44 m/s², 5 Hz to 150 Hz (EN 61373) ■ Conformal coating
Safety	<ul style="list-style-type: none"> ■ Flammability <ul style="list-style-type: none"> □ UL 94V-0
EMC	<ul style="list-style-type: none"> ■ EN 50121-3-2 (conducted disturbance) ■ IEC 61000-4-4 (burst) ■ IEC 61000-4-6 (conducted disturbances)

**Up-to-date information,
documentation and
ordering information:**
www.men.de/products/sa24m/

Germany

MEN Mikro Elektronik GmbH
Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901

info@men.de
www.men.de

France

MEN Mikro Elektronik SAS
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211

info@men-france.fr
www.men-france.fr

USA

MEN Micro Inc.
860 Penllyn Blue Bell Pike
Blue Bell, PA 19422
Phone (215) 542-9575
Fax (215) 542-9577

sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

Copyright © 2016 MEN Mikro Elektronik GmbH. All rights reserved.