

BL70S

Rugged Box PC for Transportation with Intel Core i3 / i5 / i7 Railway & Automotive Embedded Computer for Storage Control

- » Intel Core i7, 3rd generation
- » Up to 16 GB DDR3 DRAM soldered, ECC
- » RAID 0/1, hot-pluggable on 2 HDD/SSD shuttles
- » 4-port Gb Ethernet switch with PoE
- » 1 Gb Ethernet uplink
- » 1 PCI Express Mini Card slot with 2 SIM slots for WLAN, GSM (2G), UMTS (3G), LTE (4G), GPS or GLONASS functionality
- » 2 slots for IBIS, RS232, RS485, RS422
- » 24 and 36 VDC nom. class S2 PSU, with ignition
- » -40 to +85°C operating temperature, fanless
- » Conformal coating of internal components
- » Compliant to EN 50155 (railways)
- » Compliant to ISO 7637-2 (E-mark for automotive)



The BL70S is a fanless, maintenance-free box computer that has been designed for embedded storage applications such as content servers or video recorders. It offers two external SATA shuttles with hot-plugging support.

On the front of the rugged BL70S as many as five Gigabit Ethernet interfaces are accessible. Four of these ports share one Gigabit Ethernet port from the chipset via a switch, while one port is used exclusively as Gigabit Ethernet uplink. The four ports routed over the switch support Power-over-Ethernet.

One PCI Express Mini Card slot with two SIM card slots offers the possibility to implement the wide range of functionality available on this form factor. This includes for example mobile service standards GSM (2G), UMTS (3G), LTE (4G) and derivatives, wireless communication standards WLAN / Wi-Fi IEEE 802.11 and derivatives as well as positioning systems GPS or GLONASS.

The BL70S is powered by an Intel Core i7-3517UE CPU, running at 1.7 GHz. Other processors of the 3rd generation Intel Core i7 family can be used which makes for high scalability in CPU (single/dual/quad core)


performance.

The BL70S is equipped with 4 GB of DDR3 SDRAM and offers microSD card and mSATA slots. The system is designed for fanless operation at temperatures from -40 to +70°C (+85°C for up to 10 minutes), its special aluminum housing with cooling fins serves as a heat sink for the internal electronics and in this way provides conduction cooling.

The BL70S supports one DisplayPort interface with a resolution of 2560x1600. In addition, a multitude of other I/O is available at the front panel, including two USB 2.0 and variable slots for legacy serial I/O (e.g. RS232) or CAN bus.

The BL70S comes with its own integrated class S2 wide-range power supply with 24 and 36VDC nominal input voltage and a power consumption of 30 W and is in compliance with EN 50155 and ISO 7637-2 (E-mark for automotive). The power can be switched on and off using an ignition signal on the power connector, and a run-down time after switching off the power can be adjusted by software.

The various CPU options with the available selection of external interfaces makes for an extremely flexible system design that can quickly be tailored to a vast number of applications.

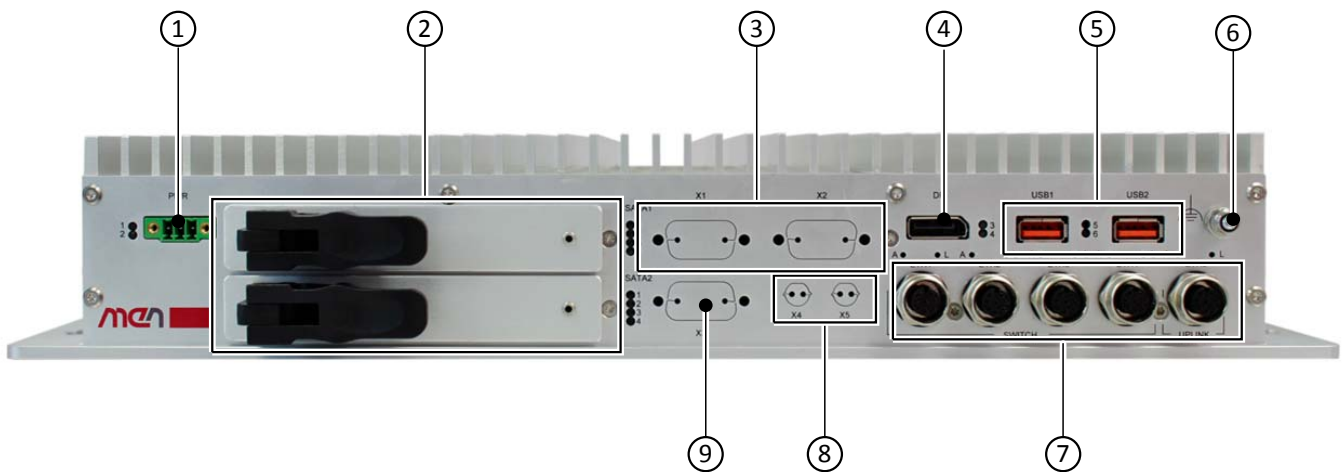

- ① PSU connector (10V-50.4V)
- ② 2 Hard Disk Shuttles
- ③ 2 SA-Adapter cutouts for RS232, RS485/422, CAN, IBIS master, IBIS slave or GPIO
- ④ 1 DisplayPort
- ⑤ 2 USB 2.0
- ⑥ Earthing Stud
- ⑦ 5 Gigabit Ethernet (4-port Ethernet switch and one uplink port)
- ⑧ 2 antenna connector cutouts for PCI Express Mini Card
- ⑨ Cutout for HD Audio

CPU

- The following CPU types are supported:
 - Intel Core i7-3517UE, Dual Core, 1.7 GHz, 4 MB Cache, 17 W
 - Intel Core i3-3217UE, Dual Core, 1.6 GHz, 3 MB Cache, 17 W (on request)
 - Intel Celeron 1047UE, Dual Core, 1.4 GHz, 2 MB Cache, 17 W (on request)
 - Intel Celeron 927UE, Single Core, 1.5 GHz, 1 MB Cache, 17 W (on request)
 - Intel Celeron 827E, Single Core, 1.4 GHz, 1.5 MB Cache, 17 W (on request)
- Chipset
 - QM77 Platform Controller Hub (PCH)

Memory

- 4 MB last level cache integrated in i7 processor
- System Memory
 - Soldered DDR3 with ECC
 - 2 GB (on request), or
 - 4 GB, or
 - 8 GB (on request), or
 - 16 GB (on request)

Mass Storage

- The following mass storage devices can be assembled:
 - Two 2.5" SATA HDD/SSD drives via external shuttles
 - One microSD card
 - One mSATA disk

Graphics

- Integrated in processor and chipset
- Maximum resolution: 2560 x 1600 pixels
- Via one DisplayPort interface

Front Interfaces

- Video
 - One DisplayPort 1.1a, AUX channel and hot plug detection
- SATA
 - Two 2.5" SATA HDD/SSD shuttles, SATA Revision 2.x (3 Gbit/s), hot-pluggable (with independent devices)
 - Four status LEDs per channel
- USB
 - Two Type A connectors, USB 2.0 (480 Mbit/s)
- Ethernet
 - Five M12 connectors, 1000BASE-T (1 Gbit/s), 4-port Ethernet switch and one uplink, or
 - On request: Five M12 connectors, 100BASE-T (100 Mbit/s), 4-port Ethernet switch and one uplink, or
 - On request: Five M12 connectors, 100BASE-T (100 Mbit/s), 4-port Ethernet switch, 1000BASE-T (1 Gbit/s), one uplink
 - Two link and activity LEDs per channel
 - Power over Ethernet PSE support on all ports, for four powered devices total
- Antenna connections
 - Two antenna connector cutouts, linked to PCI Express Mini Card, for various types (SMA, reverse SMA, QMA, FME...)
- Legacy serial I/O
 - Two SA-Adapter cutouts for:
 - RS232, not optically isolated, -40..+85°C screened, conformal coating
 - RS422/485, full duplex, optically isolated, -50..+85°C screened, conformal coating
 - RS232, optically isolated, -40..+85°C screened, conformal coating
 - CAN bus ISO high-speed, optically isolated, -40..+85°C screened, conformal coating
 - 8 digital I/O channels, -50..+85°C with qualified components, conformal coating, no RoHS
 - IBIS slave interface, isolated, -40..+85°C screened, conformal coating
 - GPS receiver, SMA antenna, isolated, -40..+85°C qualified, conformal coating
- Additional status LEDs
 - Two for general system status
 - Four user LEDs
- Power supply
- Audio (on request)
 - None, or
 - One 9-pin D-Sub connector, HD Audio with stereo in/out and SPDIF out, including HD Audio codec

In-System Interfaces

- mSATA
 - One mSATA slot, SATA Revision 2.x (3 Gbit/s)
- PCI Express Mini Card
 - One slot, for mobile service, wireless communication, positioning or real-time Ethernet functions such as
 - GLONASS and GPS PCI Express MiniCard (full size), 3-axis Gyro sensor, -40..+85°C with qualified components
 - Audio interface for mobile wireless cards, with SIM card holder, -40..+85°C screened
 - PCI Express Mini Card, CANopen Slave or Master interface, Hilscher
 - PCI Express Mini Card, Real-Time Ethernet Slave or Master interface, Hilscher
 - PCI Express Mini Card, Profibus Slave or Master interface, Hilscher
 - PCI Express Mini Card, DeviceNET Slave or Master interface, Hilscher (on request)
 - WLAN PCI Express MiniCard DNXA-116, -40 to +85°C screened, storage temperature -40° to +85°C
 - MC7304 PCI Express MiniCard, full-size on USB: LTE, DC-HSPA+, HSPA+, HSDPA, HSUPA, WCDMA, GSM, GPRS, EDGE, and GNSS, -40 to +85°C
 - Two microSIM card slots (Dual SIM)
 - PCI Express and USB interface

Supervision and Control

- System controller
 - Two front-panel LEDs for system status
- Real-time clock with supercapacitor backup
 - Data retention of supercapacitor: 72 h

Electrical Specifications

- Isolation voltage: 1500 VDC against shield
- Supply voltages
 - 24 V and 36 V nominal input voltage according to EN 50155
 - 24 V nominal input voltage according to ISO 7637-2 (E-mark) requirements
 - Input voltages of 48V, 72V, 110V (on request)
 - EN 50155 power interruption class S2
 - Ignition signal at the front
- Power consumption
 - 24 W typ.

Mechanical Specifications

- Dimensions: Height 66 mm x Width 390 mm x Length 215 mm
- Weight:
 - 4.25 kg (model 09BL70S00 in standard housing)
 - 5.5 kg (model 09BL70S00 in 19" insertion frame)

Environmental Specifications

- International Protection Rating:
 - IP20
 - Other IP protection classes possible on request
- Temperature range (operation)
 - -40°C to 70°C (screened), with up to 85°C for 10 minutes according to class Tx (EN 50155)
 - Fanless operation
- Temperature range (storage): -40°C to +85°C
- Relative humidity (operation): max. 95% non-condensing
- Relative humidity (storage): max. 95% non-condensing
- Altitude: -300 m to +3000 m
- Shock: 50 m/s², 30 ms (EN 61373)
- Vibration (function): 1 m/s², 5 Hz to 150 Hz (EN 61373)
- Vibration (lifetime): 7.9 m/s², 5 Hz to 150 Hz (EN 61373)
- Conformal coating of internal components

Reliability

- MTBF: 203 819 h @ 40°C according to IEC/TR 62380 (RDF 2000)(model 09BL70S00)

Safety

- Flammability (PCBs)
 - UL 94 V-0
- Fire Protection
 - EN 45545-2 (Railway)
 - ECE-R118 (Automotive)
- Electrical Safety
 - EN 50153
 - EN 50155

EMC Conformity (Automotive)

- ECE R10 (E-mark)
- ISO 10605 (ESD)

EMC Conformity (Railway)

- EN 50121-3-2

Software Support

- Windows 7
- Windows Embedded Standard 7
- Linux
- For more information on supported operating system versions and drivers see Software.

BIOS

- InsydeH2O UEFI Framework

Germany

MEN Mikro Elektronik GmbH

Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0

sales@men.de
www.men.de

USA

MEN Micro Inc.

860 Penllyn Blue Bell Pike
Blue Bell, PA 19422
Phone 215-542-9575

sales@menmicro.com
www.menmicro.com

France

MEN Mikro Elektronik SAS

18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33-450-955-312

sales@men-france.fr
www.men-france.fr

China

MEN Mikro Elektronik (Shanghai) Co., Ltd.

Room 808-809, Jiaxing Mansion, No. 877 Dongfang Road
200122 Shanghai
Phone +86-21-5058-0961

sales@men-china.cn
www.men-china.cn

Up-to-date information, documentation and ordering information:

www.men.de/products/bl70s/

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

© 2017 MEN Holding