

Rugged Embedded Server Solution with fanless Intel® Xeon™ Processor

General Description

The MXCS-1 is a high performance, low power and highly integrated rugged Embedded Server, built in a special designed aluminum or MIL IP67 housing. This allows to operate the MXCS in a moderate or harsh environment without fan or air vents. The design integrates standard connectors for easy connection or lockable headers, depending on housing choice. Therefore, the MXCS board can be used for any Server application where a complete solution is needed.

MXCS Highlights

The MXCS housings offer space for up to 8 x 2.5" SSD. With the internal expansion possibilities over PCI/104-Express interface and the four PCI-Express Mini Card slots, there are unlimited expansion possibilities available. Particular precautions in the design have been taken that the entire system EMC is within the CE and FCC limits and capable to meet the MIL-STD810, 461, 1275, ... as well as the standards like IEC60945 or EN50155.

Key features are:


- ECC DDR4 up to 128GB
- Up to two 1Gbit Ethernet ports
- Up to two 10Gbit Ethernet ports
- Long term availability*
- PCIe x16 expansion
- Fanless operation

The MXCS rugged Server Family has been designed to withstand harsh environments and extreme temperature conditions. The special rugged design, combined with the best industrial-grade components, offer high reliability and long-term performance.

The MXCS is available for different Industries and is the perfect embedded computer solution for industrial environments, railway applications, MIL/COTS applications, or whenever a rugged long-term available computer is needed.

MPL products are 100% designed and manufactured in Switzerland. All products are fanless, shock and vibration proof, low power, rugged, and long-term* available. The perfect solution for a system to be used in rugged environments.

* Typically 10 years or more, 20+ years repair-ability

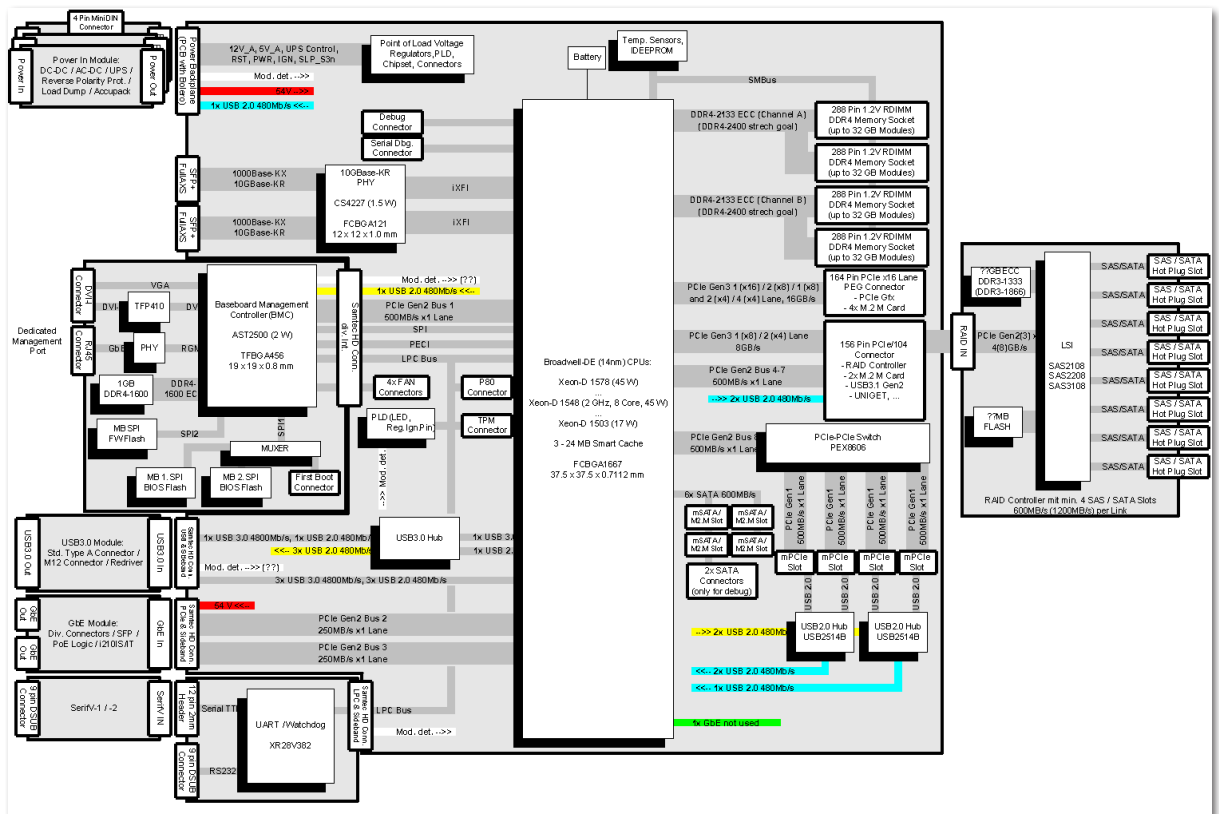

MPL AG is an ISO9001 certified company

Technical Features

Board Key Data	
Processor	Broadwell DE Xeon CPU Server Family (first series Xeon D-1548)
# of cores / threads	8 / 16
Clock speed	2.0 / 2.6 GHz
Smart Cache	12 MB
Passmark (all cores)	10'883
Memory	up to 128 GB DDR4 ECC memory in four RDIMM slots
TPM	Over separate module
Watchdog Timer	configurable granularity 1-255 sec. or 1-255 min.
Indicator LEDs	Power, Reset, various others
Interfaces	
Serial	1 x RS232 on connector 1 x RS232/422/485 on DB-9
USB	4 x USB3.0 ports on type A or M12
LAN	2 x 1Gbit copper ports on RJ45 or M12 / 2 x 10Gbit SFP+ port (copper or fiber)
Internal Expansions	
mPCIe	4 x mPCIe PCI Express Gen2 x1 lane & USB 2.0
mSATA	4 x mSATA / M2.M sockets
PCI/104-Express	1 x PCIe x8, 4 x PCIe x1 lane, 2 x USB 2.0
PCIe x16	1 x PEG graphic expansion
SATA	4 x mSATA / m2.M ports
RAID	optional RAID controller board with on-board memory and flash, up to 8 x SAS/SATA ports, RAID 0/1/5/10 support
Management Controller Board	
IPMI	Remote Management Interface
CPU	Baseboard Management Controller (BMC)
Memory	DDR4-1600 up to 1GB
Graphics	ESD protected up to 1920 x 1280
LAN	1 x GbE port, ESD protected
BIOS	AMI BIOS, redundant BIOS FLASH
Power	
Input Voltage	24 VDC (+50/-20%) input range, ESD and EMC protected power input (redundant capability) reverse polarity protection, load dump protection Reset & Power button optional internal UPS system, optional galvanic separation Ignition input specifically for vehicles
Power consumption	40 - 100 Watt (TBD), Enhanced Intel Speed Step Technology
Environment	
Storage Temperature	-45°C up to +85°C (-49°F to +185°F)
Operating Temperature	-20°C to +60°C (-4°F to +140°F) Extended operating temperature range available, MIL solutions Extended temperature range depends on the cooling capability of the housing used
Relative Humidity	5% to 95% non condensing, optional coating available
Standard Compliance	
The MXCS is designed to meet or exceed the most common standards. Particular references are:	
EMC	EN 55022, EN 55024, EN 61000, MIL-STD-461E
Shock & Vibration	EN 60068
Environmental & Safety	EN 50155, MIL-STD-810-F, EN 60601, EN 60950
Approval List	CE, IEC 60945, IACS E10



Packaging

Chassis version	length	width	heights	weight	
Standard	351mm	207mm	66mm	4.5 kg (9.9 lb.)	DIN-Rail or Flange mounting
19" Rack version	19"	200mm	2U	4.7 kg (10.4 lb.)	with HDD (custom color or foil available)
IP67 MIL	TBD				custom housings and connectors available
The aluminum housings are internally chromated, externally powder coated or anodized, no ventilation holes					

MPL AG is an ISO9001 certified company

Web: www.mpl.ch
Email: info@mpl.ch

MPL AG, Täfernstrasse 20, CH-5405 Dättwil
Phone +41 56 483 34 34 Switzerland