


TGA-100 Graphics Adapter

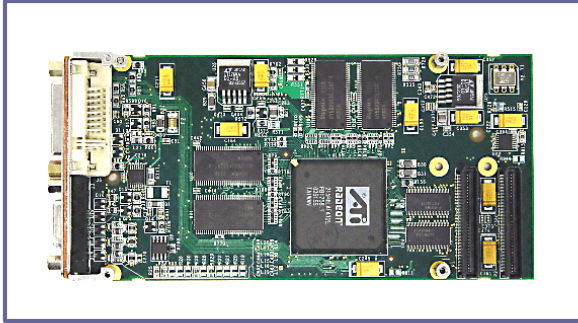

High Performance, Low Cost PMC 2-D Graphics Adapter with Dual-Display Support

Themis' TGA-100™ graphics accelerator is a high-performance, low-cost, 2-D graphics solution. Offered in a PMC form factor, the TGA-100 is compatible with Sun Microsystems™ XVR-100 graphics processing board and operates with Themis' USPIII™ VMEbus computer, USPIIe-Gb™ and USPIIe-USB™ single-board-computer products.


The TGA-100 provides users in Solaris™ and Linux®-based environments high screen resolutions, up to 1920 x 1200, while displaying up to 16.7 million colors. Themis' new TGA-100 boards are designed for use with analog CRT and analog flatpanel monitors. An optional DVI connector provides support for PanelLink compatible displays.

HD-15 and DVI-I video connectors provide users with both digital and analog video outputs as well the ability to drive two displays at up to 1280x1024 resolution. Compatible with the Sun Microsystems XVR-100 graphics technologies, the TGA-100 is supported on a wide range of Sun systems and supports Sun as well as VESA standards.

Because Themis TGA-100 graphics accelerator supports the Solaris™ 8, 9, and 10 Operating Environments, user software investments are protected. Providing native Solaris support and Sun XVR-100 compatibility in a PMC form factor, the TGA-100 is an ideal replacement for PMC graphics boards used in other operating environments.

TGA-100 Features

- The TGA-100 is a Sun XVR-100 compatible PMC graphics board
- ATI Radeon 7000 graphics engine
- Low cost graphics adaptor provides 2-D, 24-bit color graphics
- 64MB DDR SDRAM
- 32-Bit, 33-/66-MHz
- Triple 8-bit palette DAC supports pixel rates up to 350 MHz
- Dual-display and high resolution support
 - 24-bit support for up to 1280 x 1200 resolutions @ 75 Hz
- Solaris Open GL compatibility
- Designed for USPIII and USPIIe processor cards
- Operating resolutions:
 - Single display - 640x480 to 1920x1200 (24-bit)
 - Dual display - 640x480 to 1280x1024
- Solaris 8, 9, and 10 support
- Sun OpenGL for Solaris 1.3 and later

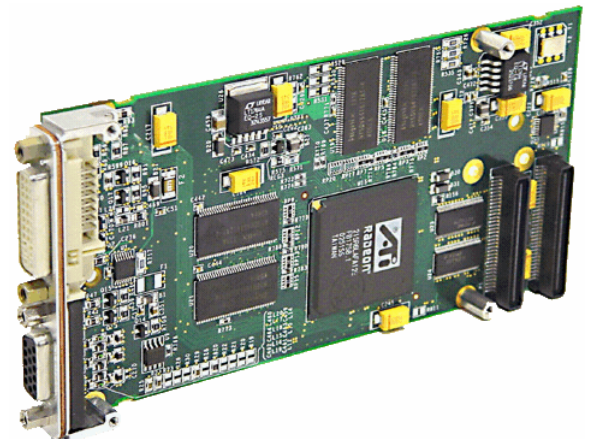

Themis Computer TGA-100 Graphics Adapter

TGA-100 Specifications

- PMC Form Factor
- PCI version 2.2 with full bus mastering and scatter/gather support
- Triple 8-bit palette DAC supports pixel rates up to 350MHz
- Two independent CRT controllers to support two asynchronous simultaneous display paths
- DDC1 and DDC2B+ for plug and play monitors
- Single channel 128-bit memory interface using SDRAM to build 64MB configurations
(Operating frequency is 67MHz minimum to 183MHz maximum, SDR or DDR)
- Video Connectors: VGA Analog
HD15
DVI digital
- Shock (Operating): up to 40G @ 20 ms
- Vibration (Operating): 0.5g from 4 – 50Hz
(Non-Operating) 1.0g from 4 – 50Hz
- Temperature Range (Operating): -5 - 55°C
- Temperature Range (Non-Operating): -40 - 85 °C
- Humidity: 10 – 95% non-condensing
- Power Reqs.: +5V (± 5%) @ 1.2 Amps maximum
- Power Consumption: 6Watts
- Dimensions (HxD): 2.952" (75mm) x 5.905" (150mm)
- Weight: approximately 3.5 oz.
- Operating resolutions – 640x480 to 1920x1200
(1280x1024 on DVI port)
- Solaris 8, 9, and 10 Operating Environment support
- Sun OpenGL for Solaris 1.3. and later



THEMIS

Themis
47200 Bayside Parkway
Fremont, CA 94538
Tel: 510-252-0870
Fax: 510-490-5529
Email: info@themis.com
www.themis.com

Themis Europe Sales Office
5 rue Irène Joliot-Curie
38320 Eybens, France
Tel: +33.476.14.77.86
Fax: +33.476.14.77.89

Themis, the Themis logo, and TGA-100 are trademarks or registered trademarks of Themis Computer. Sun, Sun Microsystems, the Sun logo, and Solaris are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries. UltraSPARC and SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. in the United States and other countries. Products bearing SPARC trademarks are based upon an architecture developed by Sun Microsystems, Inc.