

WIRELESS NETWORK COMMUNICATION MODULE FOR EMBEDDED COMPUTER SYSTEM

- LTE Advanced via M.2
- 4 Micro-SIM card slots
- WLAN via PCIe Mini Card
- GNSS receiver
- Conduction cooling of modems
- DIN rail, wall or 19" rack mounting
- -40 °C to +70 °C (+85 °C), fanless

EXTENSION FOR VARIOUS APPLICATIONS

The ME1 is a modular extension for embedded applications in transportation, e.g., in trains or wayside. The module adds wireless connectivity to the system CPU. Main applications of the module include predictive maintenance, IoT gateway, diagnostics server, smart vehicle, passenger information and ticketing systems.

WIRELESS CONNECTIVITY

The ME1 comes with two M.2 slots for high-speed LTE modems (LTE Advanced or LTE). For each M.2 slot, two front-accessible micro-SIM card slots are available. The PCI Express Mini Card slot is prepared for an additional WLAN module. For GPS/GLONASS functions, the box has an onboard GNSS receiver and an SMA antenna connector.

MODULAR SYSTEM FOR EASY CONFIGURATION

Within duagon's modular concept, the ME1 offers flexibility in built-to-order configurations. Via its extension connectors, the box can be easily combined with duagon CPU modules or other extension modules, for example a PSU or removable storage shuttles, providing additional features and short delivery times.

In the modular system, data transfer between the modules as well as the power distribution between the individual components takes place via the duagon-standardized extension connectors.



FLEXIBLE SYSTEM INSTALLATION

Various mounting options facilitate the integration of the box into an existing environment. The standard 35 mm DIN Rail mounting offers space-saving mounting of all system modules on a single rail. Wall mounting and mounting in a 19" rack using adaption brackets are an option.

The aluminum housing with cooling fins allows for fanless operation. The ME1 is maintenance free without moving parts.

ROLLING STOCK QUALIFIED AND LONG-TERM AVAILABILITY

The wireless communication module is qualified for rolling stock and wayside applications as well as for industrial automation applications. Long-term availability ensures an extended product life and future-safety.




www.duagon.com/products/me1/

DATA SHEET



ME1 | DIAGRAM

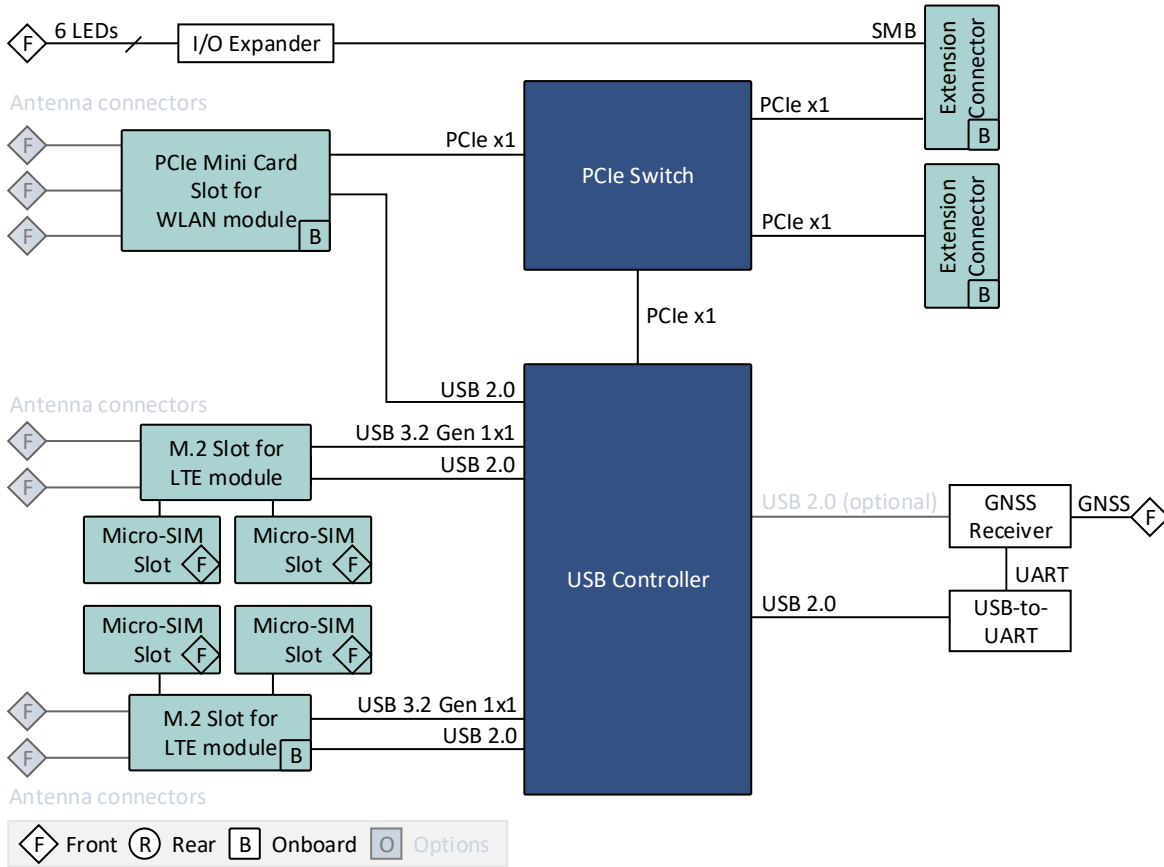

ME1 | TECHNICAL DATA

WIRELESS FUNCTIONALITY

- Possible functions:
 - GNSS
 - LTE
 - WLAN

INTERFACES

- This product includes interface options
 - Different wireless functions depending on assembled wireless interface cards

- Wireless
 - LTE 1 (Main) antenna connector: 1 × Cutout
 - LTE (Div) antenna connector: 1 × Cutout
 - LTE (Main) antenna connector: 1 × Cutout
 - LTE (Div) antenna connector: 1 × Cutout
 - WLAN 1 antenna connector: 1 × Cutout
 - WLAN 2 antenna connector: 1 × Cutout
 - WLAN 3 antenna connector: 1 × Cutout
 - GNSS antenna connector: 1 × SMA receptacle (X3)



- M.2 Card
 - 2 × M.2 Card slot
 - Slot 1: M.2 3042 (LTE) socket 2 Key B; USB 2.0, USB 3.2 Gen 1x1
 - Slot 2: M.2 3042 (LTE) socket 2 Key B; USB 2.0, USB 3.2 Gen 1x1
- PCI Express Mini Card
 - 1 × PCI Express Mini Card slot
 - PCIe Full-Mini; PCIe x1, USB 2.0
- SIM card
 - 4 × micro-SIM slot, externally accessible
- LED
 - Status: power status
 - User configurable: 3 ×
- Cutout
 - Antenna connector options: QLS receptacle, RP-SMA receptacle, SMA receptacle

ELECTRICAL SPECIFICATIONS

- Power consumption: 8 W typ.

MECHANICAL SPECIFICATIONS

- Dimensions: (W) 38 mm, (D) 144 mm, (H) 132 mm
- Weight: 450 g approx.
- Mounting
 - DIN rail
 - Wall/flat surface
 - Rack in 19" cabinet
- Cooling: Air cooling, natural convection, airflow 0.4 m/s
- Protection rating: IP20

PRODUCT COMPLIANCE: RAIL - ROLLING STOCK

- Operating temperature: -40 °C to +70 °C, +85 °C for 10 min (EN 50155:2017, class OT4, ST1)
- Rapid temperature variations: EN 50155:2017, class H1, no requirements
- Storage temperature: -40 °C (EN 50155:2017) to +85 °C (EN 60068-2-2, Bb)
- Altitude: +3000 m max. (EN 50125-1:2014, class AX)
- Pollution degree: EN 50124-1:2017, class PD3
- Humidity: +55 °C and +25 °C, 100 % RH max. (EN 50155:2017)

- Shock: 30 ms @ 50 m/s² (EN 61373:2010/AC:2017-09, vehicle body, cat. 1, class B)
- Vibration: 10 min @ 2.02 m/s² (functional) and 5 h @ 11.44 m/s² (long-life) (EN 61373:2010/AC:2017-09, vehicle body, cat. 1, class B, double acceleration)
- Electrical safety
 - EN 50155:2017
 - EN 50153:2014 + A1:2017
 - EN 50124-1:2017
 - EN ISO 13732-1:2008
- Fire protection: EN 45545-2:2013 + A1:2015, HL3
- EMC emission
 - EN 50121-3-2:2016 + A1:2019
 - Regelung Nr. EMV 06 :2014-07-29, Anhang E: Messung an Geräten
- EMC immunity: EN 50121-3-2:2016 + A1:2019
- Protective coatings: EN 50155:2017, class PC2 (Any PCB protected on both sides)
- Useful life: 20 years (EN 50155:2017, class L4)

PRODUCT COMPLIANCE: RAIL - WAYSIDE NON-SAFETY RELATED

- Operating temperature: -40 °C to +70 °C (EN 50125-3:2003, class T2, cubicle, with class T2 maximum extended by 5 °C)
- Storage temperature: -40 °C (EN 60068-2-1:2007, Ab) to +85 °C (EN 60068-2-2:2007, Bb)
- Altitude: +3000 m max. (EN 50125-3:2003, class AX)
- Humidity: 100 % RH max. (EN 50125-2:2002, control cabinet, class T1/T2/TX)
- Shock: 11 ms @ 20 m/s² (EN 50125-3:2003, in a switch cabinet 1 m to 3 m from the track)
- Vibration: 2.3 m/s² (EN 50125-3:2003, in a switch cabinet 1 m to 3 m from the track)
- Electrical safety
 - EN 50124-1:2017
 - EN 62368-1:2014 + AC:2015
- EMC emission
 - EN 50121-4:2016
 - EN 61000-6-4:2007 + A1:2011



- EMC immunity
 - EN 50121-4:2016
 - EN 61000-6-2:2005

PRODUCT COMPLIANCE: ROAD VEHICLE

- EMC emission: ECE R10 Rev.5
- EMC immunity: ECE R10 Rev.5

PRODUCT COMPLIANCE: INFORMATION TECHNOLOGY EQUIPMENT

- Operating temperature: 0 °C (EN 60068-2-1:2007, Ae, temperature value in compliance with 6.6 b) to +60 °C (EN 60068-2-2:2007, Be)
- Storage temperature: -40 °C (EN 60068-2-1:2007, Ab) to +85 °C (EN 60068-2-2:2007, Bb)
- Humidity: +55 °C and +25 °C, 90 % to 100 % RH (EN 60068-2-30:2005, Db)
- Electrical safety: EN 62368-1:2014 + AC:2015
- EMC emission
 - EN 55032:2015 (multimedia equipment), class A (industrial environments)
 - EN 61000-3-2:2014
 - EN 61000-3-3:2013

- EMC immunity: EN 55024:2010 + A1:2015 (information technology equipment)

RELIABILITY

- MTBF: 2 166 000 h predicted @ 40 °C according to IEC/TR 62380 (RDF 2000)

SOFTWARE SUPPORT

- Linux
 - duagon Yocto BSP
 - Tested with: duagon Yocto BSP (Kirkstone 4.0, Linux kernel 5.15); Lubuntu 18.04 X LTS
- Windows
 - Windows 10 IoT Enterprise 64-bit
- Further Resources
 - See the product User Manual for details on software support: www.duagon.com/products/me1/#doc
 - See section Software on the product web page for available packages: www.duagon.com/products/me1/#downl

ME1 | ORDERING INFORMATION

STANDARD MODELS


06ME01-10 Modular extension, wireless communication, GNSS, 2x M.2 Slot for LTE function, PCI Express Mini Card Slot for WLAN function, -40 °C to +70 °C (+85 °C)

- ▶ ME1 product page with an up-to-date list of standard models and available accessories: www.duagon.com/products/me1/



duagon WORLDWIDE

duagon has a global presence with support and sales representatives across eight countries. With three decentralized engineering and production sites, our customers take advantage of the added competence and flexibility.

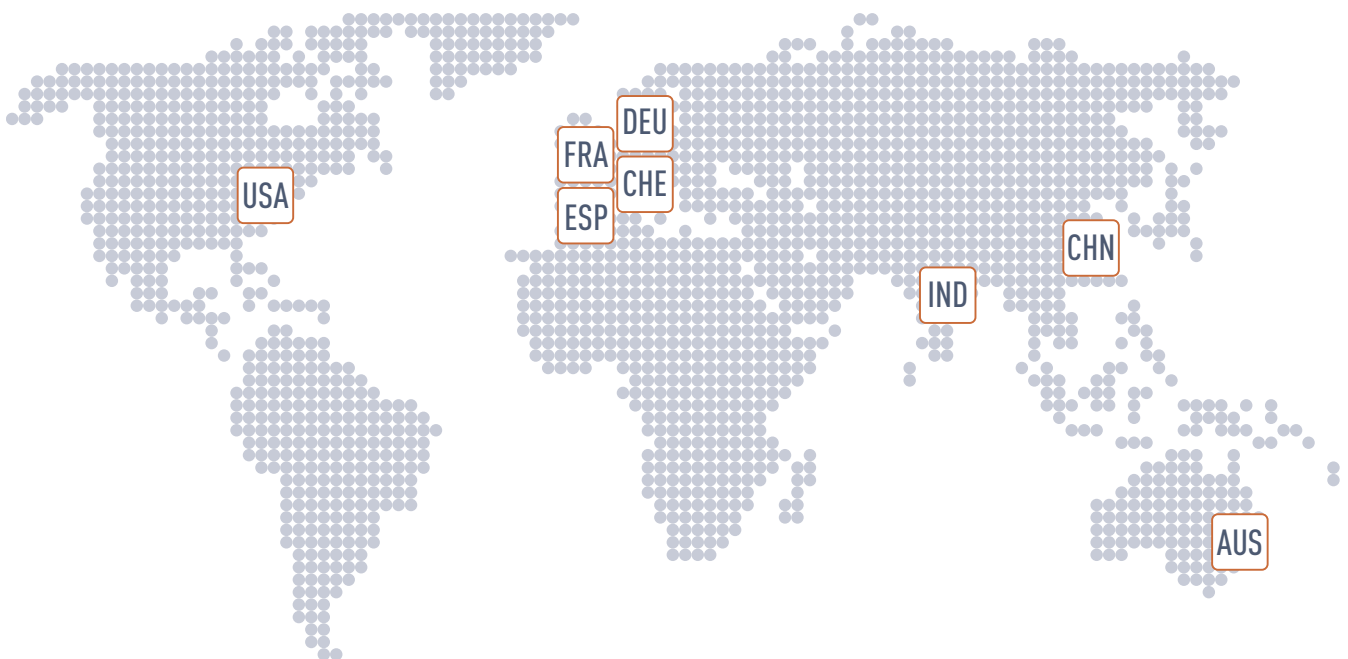

www.duagon.com

Copyright © 2024 duagon AG.
All rights reserved.

All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Specifications are subject to change without notice. duagon is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.