

# GM3 – Quad Gigabit Ethernet Rear I/O Card

- Mezzanine card for CompactPCI® Serial CPU boards
- Four 10/100/1000Base-T Ethernet channels
- Support of full mesh and star architecture
- Wake-on-LAN
- Fully integrated to comply with IEEE802.3u and IEEE802.3ab
- TCP/IP checksum offload
- -40 to +85°C screened




The GM3 is a mezzanine card which is plugged onto CompactPCI® Serial CPU boards to implement four Ethernet interfaces on the backplane. The CompactPCI® Serial standard defines up to eight Ethernet interfaces, which can be connected in a star or

in full mesh architecture via the backplane. The GM3 is used to implement four Gigabit Ethernet interfaces, which are led to the backplane via CompactPCI® Serial connector P6. All four interfaces are controlled by one Ethernet controller, which supports the IEEE 802.3x standard.

In addition, the GM3 also provides a mini SATA SSD slot. The board is screened for operation in the extended temperature range of -40 to +85°C.

## Diagram

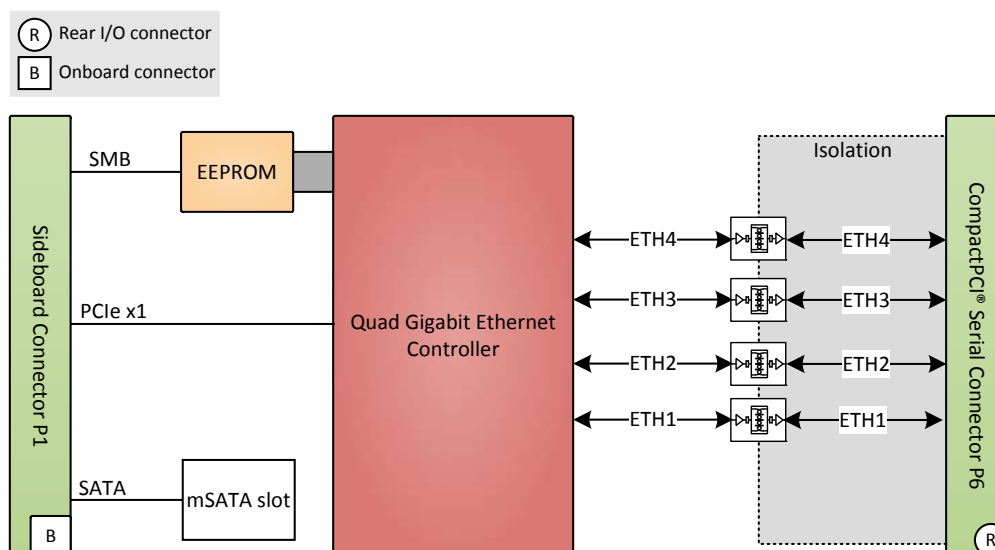

## Technical Data

<b>Ethernet Interfaces</b>	<ul style="list-style-type: none"><li>■ Four 10/100/1000Base-T interfaces</li><li>■ IEEE802.3x support<ul style="list-style-type: none"><li>□ Full-duplex flow control</li><li>□ 100 Mbit/s data transfer rate for each interface when used simultaneously</li></ul></li><li>■ TCP/IP checksum offload</li><li>■ Wake-on-LAN support</li></ul>
<b>mSATA slot</b>	<ul style="list-style-type: none"><li>■ Solid state drive socket</li></ul>
<b>CompactPCI® Serial</b>	<ul style="list-style-type: none"><li>■ Compliance with CompactPCI® Serial PICMG CPCI-S.0 Specification</li><li>■ Ethernet interfaces via CompactPCI® Serial connector P6</li></ul>
<b>Electrical Specifications</b>	<ul style="list-style-type: none"><li>■ Supply voltage/power consumption:<ul style="list-style-type: none"><li>□ +3.3 V (-10%/+10%) from CPU board, 5.83 W max.</li><li>□ ±0.79 W standby max.</li></ul></li></ul>
<b>Mechanical Specifications</b>	<ul style="list-style-type: none"><li>■ Dimensions: 81 mm x 95 mm (without P6 connector)</li><li>■ Weight: 40 g</li></ul>
<b>Environmental Specifications</b>	<ul style="list-style-type: none"><li>■ Temperature range (operation):<ul style="list-style-type: none"><li>□ -40..+85°C (screened)</li><li>□ Airflow: min. 1.5 m/s</li></ul></li><li>■ Temperature range (storage): -40..+85°C</li><li>■ Relative humidity (operation): max. 95% non-condensing</li><li>■ Relative humidity (storage): max. 95% non-condensing</li><li>■ Altitude: -300 m to +3,000 m</li><li>■ Shock: 50 m/s<sup>2</sup>, 30 ms</li><li>■ Vibration (Function): 1 m/s<sup>2</sup>, 5 Hz - 150 Hz</li><li>■ Vibration (Lifetime): 7.9 m/s<sup>2</sup>, 5 Hz - 150 Hz</li><li>■ Conformal coating on request</li></ul>
<b>MTBF</b>	<ul style="list-style-type: none"><li>■ 3,269,078 h @ 40°C according to IEC/TR 62380 (RDF 2000)</li></ul>
<b>Safety</b>	<ul style="list-style-type: none"><li>■ PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers</li></ul>
<b>EMC</b>	<ul style="list-style-type: none"><li>■ Conforming to EN 55022 (radio disturbance)</li></ul>
<b>Software Support</b>	<ul style="list-style-type: none"><li>■ Windows®</li><li>■ Linux</li></ul>

## Configuration & Options

### Options

#### Operating Temperature

- Depends on system configuration
- Maximum: +85°C
- Minimum: -50°C

Please note that some of these options may only be available for large volumes. Please ask our sales staff for more information.

## Ordering Information

<b>Standard GM3 Models</b>	<b>08GM03-00</b>	CompactPCI® Serial 4x Gigabit Ethernet rear I/O card, -40..+85°C
<b>Related Hardware</b>	<b>02G022-00</b>	Intel® Celeron® 1047UE 1.4 GHz, 2 GB DDR3 DRAM with ECC, -40..+85°C
	<b>02G022-01</b>	Intel® Core™ i7-3615QE SV, 2.3 GHz, 4 GB DDR3 DRAM with ECC, 0..+45°C
<b>Memory</b>	<b>0751-0051</b>	SSD mSATA, 8 GB, -40..+85°C
<b>Software: Linux</b>	This product is designed to work under Linux. See below for potentially available separate software packages from MEN.	
	<b>13T001-90</b>	Linux network driver (MEN) for G211, G211F, GM1, GM2 and GM3
<b>Software: Windows®</b>	This product is designed to work under Windows®. See below for potentially available separate software packages from MEN.	
	<b>13T010-70</b>	Windows® 32-bit network driver (Intel®) for XM1, XM1L, XM2, MM2, F11S, F18, F18E, F19P, F21P, F22P, G20, G22, GM1, GM2, GM3, G211, G211F, SC24, BC50I, BC50M and BL50W
	<b>13T020-70</b>	Windows® 64-bit network driver (Intel®) for F18, F18E, F19P, F21P, F22P, G20, G22, GM1, GM2, GM3, G211, G211F, XM2, SC24, BC50I, BC50M and BL50W

For operating systems not mentioned here [contact MEN sales](#).

## Contact Information

---

### Germany

MEN Mikro Elektronik GmbH  
Neuwieder Straße 3-7  
90411 Nuremberg  
Phone +49-911-99 33 5-0  
Fax +49-911-99 33 5-901

info@men.de  
www.men.de

### France

MEN Mikro Elektronik SAS  
18, rue René Cassin  
ZA de la Châtelaine  
74240 Gaillard  
Phone +33 (0) 450-955-312  
Fax +33 (0) 450-955-211

info@men-france.fr  
www.men-france.fr

### USA

MEN Micro Inc.  
860 Penllyn Blue Bell Pike  
Blue Bell, PA 19422  
Phone (215) 542-9575  
Fax (215) 542-9577

sales@menmicro.com  
www.menmicro.com

*The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.*

*MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.*

*MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.*

*The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.*

*In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.*

Copyright © 2014 MEN Mikro Elektronik GmbH. All rights reserved.